



Eric Adams
Mayor
Ydanis Rodriguez
Commissioner

COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name:
Cafe Location:
Application Number:
CB Feedback Deadline (on date or next business day):
NYCDOT Internal Use Only

Roadway Cafe Setup Comments:

Comments related to the cafe's **physical footprint and dimensions**:

Comments related to **pedestrian flow** (i.e., visibility, safety, potential crowding):

Comments related to potential conflicts with **existing curb use** (i.e., planters, bike racks, bus stops):

Overall recommendation for the cafe setup:

Suggested modifications related to the above referenced application:

Community Board Authorizing Name

Date

RESTAURANT DETAILS- BARRIO CHINO (20240724010021)

Food Service Establishment Permit(FSEP)

FSEP#: 40975524

Expiration Date: 07/31/2025

DOHMH Status: CURRENT

Business Legal Name: BARRIO CHINO LLC

Assumed Name: BARRIO CHINO

Business Address: 253 BROOME STREET, NEW YORK, NY 10002

Venue Type: Mongolian Barbecue

Last updated from DOHMH: 12/09/2024

Restaurant Information

Phone: (212) 228-6710

Email Address: info@barriochinony.com

DOS Information

DOS ID#: 2795272

Process Name: Barrio Chino LLC

DOS Address: 253 Broome, New York, New York 10002

NYS Liquor Authority Information

NYSLA Serial No: 1136284

License Type: On-Premises

Name of License: Barrio Chino LLC

Title of Representative: Co Owner

Name of Certificate Holder: Barrio Chino LLC

User Information

Created By: Dylan Dodd

Created On: 7/23/2024 4:05:45 PM

Modified By: Chase Ridge

Modified On: 12/5/2024 1:18:10 PM

Business hours

Sun: 11:00 AM- 11:00 PM

Mon: 12:00 PM- 11:00 PM

Tues: 12:00 PM- 11:00 PM

Wed: 12:00 PM- 11:00 PM

Thurs: 12:30 PM- 11:00 PM

Fri: 12:00 PM- 12:00 AM

Sat: 11:00 AM- 12:00 PM

SECTION 2: Required Clearances

- Please provide distances from the following objects.
- Only provide a distance if the listed object is within 15 feet of your proposed setup.
- Refer to the [Setup Guides](#) in the Dining Out NYC website for more information regarding clearances.

Elements with minimum 15 feet clearance from roadway cafe:

R01- Subway Stair: Open End NA feet R02- Fire Hydrant NA feet

Elements with minimum 10 feet clearance from roadway cafe:

R03- Subway Elevator Entrance NA feet R05- MTA Curb Cut NA feet
 R04- FDNY Curb Cut NA feet

Elements with minimum 5 feet clearance from roadway cafe:

R06- Curb Cut NA feet R11- CitiBike/Bike Share Station NA feet
 R07- Emergency Exit Hatch NA feet R12- Bike Corral NA feet
 R08- Subway Stair: Closed End NA feet R13- Micromobility Station NA feet
 R09- Subway Elevator: Non-Entry NANA feet R14- Drainage Infrastructure NA feet
 R10- Bus Stop Pole:
 Non- Approaching Side _____ feet

Elements with minimum 3 feet clearance from roadway cafe:

R15- Elevated Train Infrastructure NA feet R16- Transformer Vault NA feet

Elements with minimum 1 foot and 6 inches clearance from roadway cafe:


R17- Vent Infrastructure: 3.4 feet R18- Manholes NA inches
 utility vent poles, vent grates, subway grates

Elements with minimum 6 inches clearance from roadway cafe:

R19- Thermoplastic Marking NA feet

Roadway cafe distance from crosswalks:

R20- Adjacent to non-approaching side of crosswalk (min. 8 foot distance) _____ feet
 R21- Adjacent to approaching (stopping) side of crosswalk (min. 20 foot distance) _____ feet
 R22- No crosswalk present (maintain 20 feet from curb line of intersecting street) _____ feet

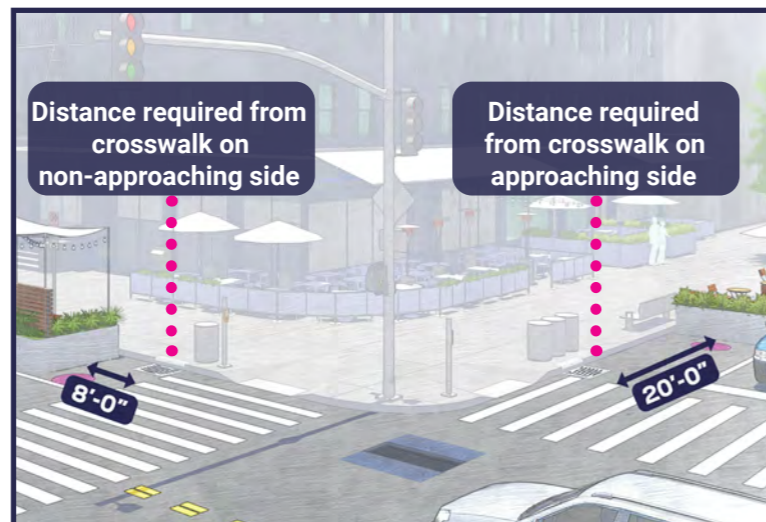

Check this box if none of the objects listed above are within 15 feet of the proposed setup.

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements.
- Refer to the [Setup Guides](#) in the Dining Out NYC website for more information regarding materials.

Materials Checklist:

Required

Barriers (All of the following must be met)

- Maintained on all sides of the cafe except the side fronting the ground floor restaurant.
- Not permanently affixed to the roadway.
- 30-42 inches tall (excluding planting), and at least 4 inches in width.
- Barriers are interconnected with each other.
- Any cladding over the barriers is securely fastened or affixed.
- Minimum 4 inches wide reflective strip on each barrier on the outward facing side.
- Water-filled with a minimum of 150 pounds per linear foot of barrier length.

Optional - Only check the material categories you intend to use in your roadway cafe

Flooring (if using, all of the following must be met)

- Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.
- Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements.
- Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.

Furnishings (if using, all of the following must be met)

- Lightweight and easily movable.

Vertical Screenings (if using, all of the following must be met)

- Located between the barrier and 6 feet above the cafe base or floor.
- Located on the roadway facing side, does not extend beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.
- Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.
- If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Overhead Coverings/ Umbrellas (if using, all of the following must be met)

- Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.
- Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.
- Easily removable, comprised of fire-grade and wind resistant materials.
- If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.

Lighting and Electrical Connections (if using, all of the following must be met)

- Any lighting is outdoor rated, properly secured, and lightweight.
- At least 14 feet above sidewalk, and 18 feet above roadway.
- Not attached to any City property, including street trees.
- Electrical work complies with the applicable requirements set forth in DOT's rules and the New York City Electrical Code. Please note that this may require additional permits from DOB or FDNY, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.