



COMMUNITY BOARD FEEDBACK PACKAGE

Please review this application and provide the required feedback.

DINING OUT NYC

COMMUNITY BOARD RECOMMENDATION FORM

This form is to be used by community boards during the cafe review process. Any comments from the community board should be recorded on this form and submitted to NYC DOT. For information pertaining to specific cafe design requirements, visit the Dining Out NYC website for program legislation, rules, and Setup Guides.

Business Name:
Cafe Location:
Application Number:
CB Feedback Deadline (on date or next business day):
NYCDOT Internal Use Only
Roadway Cafe Setup Comments:
Comments related to the cafe's physical footprint and dimensions:
Comments related to pedestrian flow (i.e., visbility, safety , potential crowding):
Comments related to potential conflicts with existing curb use (i.e., planters, bike racks, bus stops):
Overall recommendation for the cafe setup:
Suggested modifications related to the above referenced application:
ouggested modifications related to the above referenced application.

RESTAURANT DETAILS

Food Service Establishment Permit(FSEP)

FSEP#: 50007666

Expiration Date: 03/31/2026 DOHMH Status: CURRENT

Business Legal Name: you're almost there, inc.

Assumed Name: BIBI WINECELLAR

Business Address: 211 E 4TH ST, NEW YORK, NY 10009

Venue Type: Wine Bar

Last updated from DOHMH: 02/10/2025

Restaurant Information Entity Type: Corporation Phone: (212) 673-2424

Email Address: jonny@bibiwinebar.com

Secondary Email Address: jonnycohen@mac.com

DOS Information DOS ID#: 4379212

Process Name: jonathan cohen

DOS Address: 28 w 8th st w 8th st, New York, New York 10011

NYS Liquor Authority Information

NYSLA Serial No: 1271324 License Type: On-Premises

Name of License: youre almost there inc Title of Representative: jonathan cohen Name of Certificate Holder: jonathan cohen

User Information

Created By: jonathan cohen

Created On: 8/3/2024 2:02:21 PM

Modified By: Matthew Choi

Modified On: 2/10/2025 11:07:23 AM

Business hours

Sun:4:00 PM- 12:00 AM

Mon:5:00 PM- 12:00 AM

Tues:5:00 PM- 12:00 AM

Wed:5:00 PM- 12:00 AM

Thurs:4:00 PM- 1:00 AM

Fri:4:00 PM- 1:00 AM

Sat:4:00 PM- 1:00 AM

SECTION 1: Site Plan

- . This Site Plan form is required to be uploaded in the "Roadway Site Plan" field of your online application.
- Refer to the How to Apply page in the Dining Out NYC website for more information about the application process.

Identify Permitted Parking Location:

- Identify the Parking Sign in front of or around the area where your roadway setup would be located.
- Roadway cafes can only be placed in:
- 1. Parking spaces, which include: metered and non-metered spaces, commercial parking, alternate side parking, angled parking, and seasonally restricted parking.
- 2. Loading areas, including loading only, truck loading, hotel loading, and no parking zones.
- 3. Floating Parking Lane, a parking lane that is separated from the curb by a protected bicycle lane that is adjacent to the curb.



P2- Loading Area

P3- Floating Parking Lane



Roadway Cafe Site Plan Form

Applicant Name: JOHATHIM COHE

Restaurant Name: DID WINEBAR

FSEP Number:

Drawing Requirements

Food service establishment frontage

- · Line representing the establishment's space facing the sidewalk
- Lenath
- Label

Street names:

Labels on each street

Sidewalk shown as:

Line representing street curb

Roadway shown as:

Width of curbside lane

Cafe perimeter shown as:

- Lines indicating perimeter
- · Length and width

Set-up furniture (tables, chairs, etc.) shown as:

· Lines or symbols at approximate location within setup


Elements (in Section 2 of this form) within 15 feet of cafe perimeter, shown as:

- Lines or symbols
- Distance from cafe perimeter
- Labels

Utility coverings (water/gas valves, and pull boxes) shown as:

· Symbols representing the location within the setup

North arrow

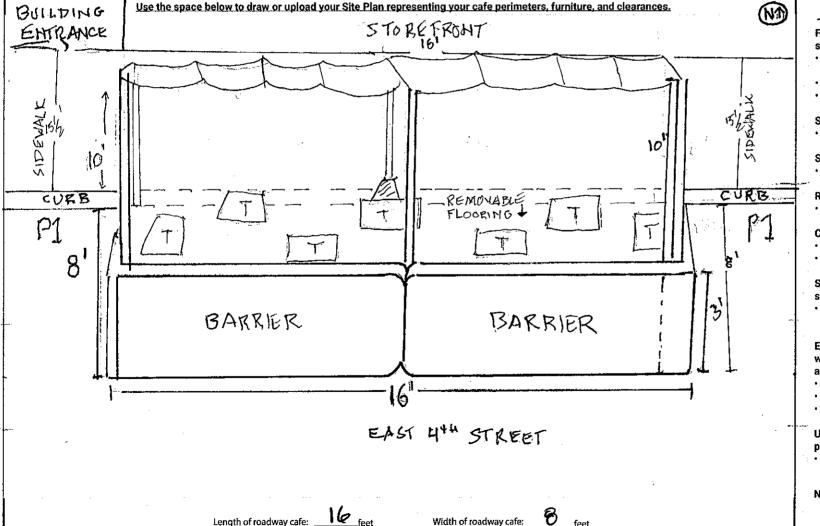

SECTION 2: Required Clearanc	es		
 Please provide distances from the Only provide a distance if the liste Refer to the <u>Setup Guides</u> in the D 	d object is wi	jects. thin 15 feet of your proposed setup Cwebsite for more information rega	arding clearances.
Elements with minimum 15 feet cle	arance from r	oadway cafe:	
R01- Subway Stair: Open End	feet	R02- Fire Hydrant	feet
Elements with minimum 10 feet cle	arance from r	padway cafe:	
R03- Subway Elevator Entrance	feet	R05- MTA Curb Cut	feet
R04- FDNY Curb Cut	feet		
Elements with minimum 5 feet clear	rance from ro	adway cafe:	
R06- Curb Cut	feet	R11- CitiBike/Bike Share Station	feet
R07- Emergency Exit Hatch	feet	R12- Bike Corral	feet
R08- Subway Stair: Closed End	feet	R13- Micromobility Station	feet
R09- Subway Elevator: Non-Entry	feet	R14- Drainage Infrastructure	feet
R10- Bus Stop Pole:			
Non- Approaching Side	feet		
Elements with minimum 3 feet clear	rance from ro	adway cafe:	
R15- Elevated Train Infrastructure	feet	R16- Transformer Vault	feet
Elements with minimum 1 foor and	6 inches clea	rance from roadway cafe:	
R17-Vent Infrastructure: utility vent poles, vent grates, subway grates	feet	R18- Manholes	inches
Elements with minimum 6 inches cl	earance from	roadway cafe:	
R19-Thermoplastic Marking	feet		
Roadway cafe distance from crossy	valks:		
R20- Adjacent to			
non-approaching side of			
crosswalk (min. 8 foot distance)	feet		stance required om crosswalk on
-			pproaching side
R21- Adjacent to approaching (stopping)			0
side of crosswalk		9 1975	enist.
(min. 20 foot distance)	feet		
R22- No crosswalk present			EO O
(maintain 20 feet from			
curb line of intersecting street)	feet		- Same
S of the state of	te listed above	are within 15 feet of the proposed se	turn

SECTION 3: Material Requirements

- Please indicate which of the following materials will be part of your roadway cafe by checking the box next to the category. If applicable, please confirm the materials comply with the Dining Out NYC requirements. Refer to the <u>Setup Guides</u> in the Dining Out NYC website for more information regarding materials.

Materials Checklist:
Required
Barriers (All of the following must be met)
Maintained on all sides of the cafe except the side fronting the ground floor restaurant.
Not permanently affixed to the roadway.
30-42 inches tall (excluding planting), and at least 4 inches in width.
Barriers are interconnected with each other.
Any cladding over the barriers is securely fastened or affixed.
Minimum 4 inches wide reflective strip on each barrier on the outward facing side.
Water-filled with a minimum of 150 pounds per linear foot of barrier length.
Optional - Only check the material categories you intend to use in your roadway cafe
Flooring (if using, all of the following must be met)
 Durable, lightweight, easily removable, mold-resistant, elevated from the ground level to allow for drainage, and removable to allow for cleaning.
Flush with the curb line (except if located on a slope, be flush to the greatest extent feasible), and compliant with applicable accessibility requirements.
Maintains a 6 inch covered channel between curb and base of flooring to allow for drainage.
Furnishings (if using, all of the following must be met)
Lightweight and easily movable.
Vertical Screenings (if using, all of the following must be met)
Located between the barrier and 6 feet above the cafe base or floor.
Located on the roadway facing side, does not extend the beyond the perimeter of the roadway cafe, and is not affixed to the outward facing side of barriers.
Easily removable, comprised of non-opaque, fire-grade, and wind resistant materials.
If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.
Overhead Coverings/ Umbrellas (if using, all of the following must be met)
Minimum of 7 feet and maximum of 10 feet from the base or floor of the roadway cafe.
Has a weighted base and any support structures are not affixed to the outward facing side of barriers, are of sufficient size and strength, made of durable materials, and free of defects.
/ Easily removable, comprised of fire-grade and wind resistant materials.
If within 50 feet of any regulatory or warning signs, does not exceed 46 inches in height.
Lighting and Electrical Connections (if using, all of the following must be met)
Any lighting is outdoor rated, properly secured, and lightwelght.
At least 14 feet above sidewalk, and 18 feet above roadway.
Not attached to any City property, including street trees.
☐ Electrical work complies with the applicable requirements set forth in DOT's rules and the New York City Electrical Code. Please note that this may require additional permits from DOB or FDNY, and/or approval from the Landmarks Preservation Commission (LPC) as applicable.